

Retro Ref. Photoelectric Sensors




PHOTOELECTRIC SENSORS IN RECTANGULAR HOUSING 12 ÷ 30 V DC WITH TIMER PROGRAMMABLE OUTPUT

- **Rectangle compact size**
- **Multi-function timer**
- **ON/OFF delay**
- **One shot-four functions**
- **NPN or PNP programmable outputs**
- **Conduit wiring terminal block**


FW Series



Identification code

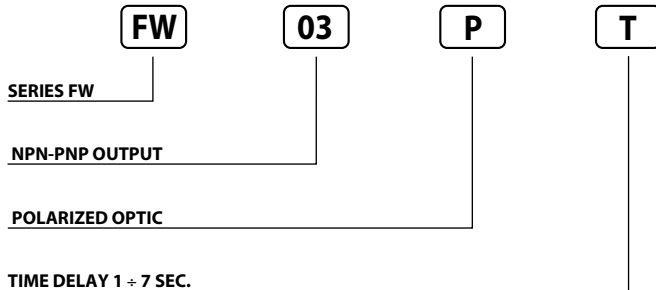

Wiring diagrams

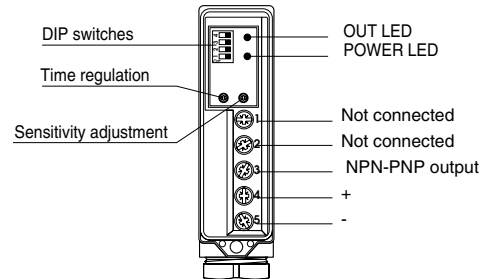


AVAILABLE	POLARIZED	STANDARD
SWITCHING DISTANCE	6 m ⁽¹⁾	10 m ⁽¹⁾
HYSTERESIS	10%	
EMISSION	Red (660 nm)	Infrared (875 nm)
NOMINAL VOLTAGE	12 ÷ 30VDC (-15 /+10%)	
RESIDUAL RIPPLE	≤ 10%	
OUTPUT	NPN or PNP (programmable)	
MAX OUTPUT CURRENT	200 mA	
ABSORPTION	≤ 40 mA	
VOLTAGE DECREASE	≤ 2.5 VDC	
YELLOW LED	Light on indicator	
GREEN LED	Supply indicator	
SENSITIVITY ADJUSTMENT	Trimmer 1 turn	
TIME REGULATION	0.1 ÷ 7 s ± 2 s (only models with timer)	
SWITCHING FREQUENCY	200 Hz	
RESPONSE TIME	5 mS	
START UP DELAY	≤ 300 mS	
PROTECTION AGAINTS SHORT-CIRCUIT	Present (self-resetting)	
TEMPERATURE LIMITS	-10° ÷ +60°C	
LIGHT IMMUNITY	10.000 Lux ⁽²⁾	
PROTECTION DEGREE	IP 67	
CONNECTIONS	Screw	
CABLE GUIDE	PG 13.5	
HOUSING MATERIAL	Housing: ABS - Lenses: methacrylate	
WEIGHT (Approximately)	110 g	

⁽¹⁾ Determined with CT04S reflector.


⁽²⁾ Determined with halogen tungsten lamp 3000° K.

Note: for a proper use see norms at pages 7, 8, 9 and 10.

Dimensions (mm)

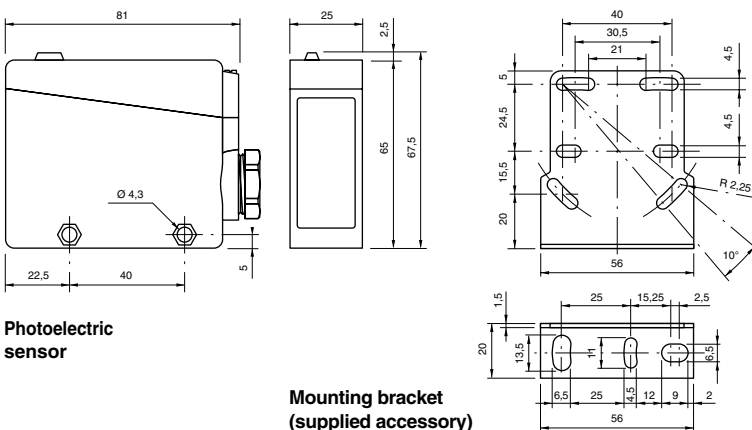

Timing diagrams



ALL MODELS

NO.	FUNCTION	DIP SWITCHES	OUTPUT DIAGRAM								
1	Muting	<table border="1"> <tr> <td>1</td> <td>2</td> <td>3</td> <td>4</td> </tr> <tr> <td>ON</td> <td>OFF</td> <td>ON</td> <td>OFF</td> </tr> </table>	1	2	3	4	ON	OFF	ON	OFF	PNP = NO NPN = NO
1	2	3	4								
ON	OFF	ON	OFF								

MODELS WITHOUT TIMER

1	Normally ON PNP	<table border="1"> <tr> <td>1</td> <td>2</td> <td>3</td> <td>4</td> </tr> <tr> <td>ON</td> <td>OFF</td> <td>ON</td> <td>OFF</td> </tr> </table>	1	2	3	4	ON	OFF	ON	OFF	PNP = NC NPN = NO
1	2	3	4								
ON	OFF	ON	OFF								
2	Normally ON NPN	<table border="1"> <tr> <td>1</td> <td>2</td> <td>3</td> <td>4</td> </tr> <tr> <td>ON</td> <td>OFF</td> <td>ON</td> <td>OFF</td> </tr> </table>	1	2	3	4	ON	OFF	ON	OFF	PNP = NO NPN = NC
1	2	3	4								
ON	OFF	ON	OFF								


MODELS WITH TIMER

1	Delay on operate output ON	<table border="1"> <tr> <td>1</td> <td>2</td> <td>3</td> <td>4</td> </tr> <tr> <td>ON</td> <td>OFF</td> <td>ON</td> <td>OFF</td> </tr> </table>	1	2	3	4	ON	OFF	ON	OFF	PNP = NC NPN = NO
1	2	3	4								
ON	OFF	ON	OFF								
2	Delay on operate output OFF	<table border="1"> <tr> <td>1</td> <td>2</td> <td>3</td> <td>4</td> </tr> <tr> <td>ON</td> <td>OFF</td> <td>ON</td> <td>OFF</td> </tr> </table>	1	2	3	4	ON	OFF	ON	OFF	PNP = NO NPN = NC
1	2	3	4								
ON	OFF	ON	OFF								
3	One shot trailing edge output ON	<table border="1"> <tr> <td>1</td> <td>2</td> <td>3</td> <td>4</td> </tr> <tr> <td>ON</td> <td>OFF</td> <td>ON</td> <td>OFF</td> </tr> </table>	1	2	3	4	ON	OFF	ON	OFF	PNP = NC NPN = NO
1	2	3	4								
ON	OFF	ON	OFF								
4	One shot trailing edge output OFF	<table border="1"> <tr> <td>1</td> <td>2</td> <td>3</td> <td>4</td> </tr> <tr> <td>ON</td> <td>OFF</td> <td>ON</td> <td>OFF</td> </tr> </table>	1	2	3	4	ON	OFF	ON	OFF	PNP = NO NPN = NC
1	2	3	4								
ON	OFF	ON	OFF								

Characteristic curves

RETRO REFLECTIVE

Distance X (cm)



POLARIZED RETRO REFLECTIVE

Distance X (cm)

